


When you plug into shore power mains electricity in the marina you connect your boat to all the other boats and to the metal pontoons and pilings via the earth connection in your power cord. This creates a perfect electrical "return" path for destructive underwater galvanic and stray currents resulting in rapid loss to your anodes and fast corrosion to propellers, outdrives, shafts, rudders, engines and hulls!

Don't ignore it! it's too late when you pull out and see the damage!

Safeshore Marine are the market leaders in the manufacture and supply of highly effective galvanic isolators for corrosion protection in boats and yachts. This product will save you £££,s in wasted anodes and will protect your propellers, shafts, outdrives, rudders, engines and hull from destructive galvanic currents.

Buy with confidence...24,000 boat owners can't be wrong!

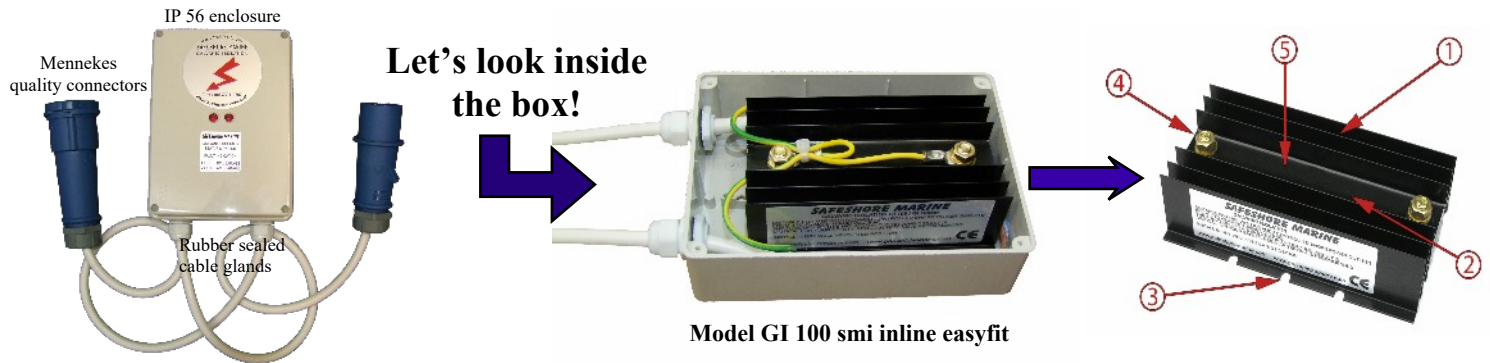

Simply plugs into the shore power cable for instant protection for standard 16 amp shore power pedestals

The **internal** isolator is **100 amp** rated for maximum reliability. The waterproof enclosure can be securely mounted....Theft proof!

1. Essential multifinned heatsinks.. Under fault conditions all galvanic isolators must be able to control the heat generated by the internal diodes. Safeshore utilise large multi finned construction to ensure integrity of internal components and safe reliable operation.
2. Epoxy sealed to prevent water ingress.
3. Multipoint flange mounting for secure mounting inside the waterproof enclosure.
4. 8mm brass connectors Robust connectors for heavy duty current operation. 30 amp heavy duty cable.
5. **Under the bonnet** Heavy duty high grade internal components for maximum reliability. Safeshore **2 stage** maximum protection isolator. Sealed waterproof construction for guaranteed service life . Safety compliant.

Over 24,000 UK boats are now protected by Safeshore isolators.

Maximum protection and reliability with Safeshore full lifetime no nonsense warranty

- Genuine lifetime warranty backed up by **20 years** track record of reliability.
- Anodised multi finned construction for effective cooling under severe fault conditions
- Waterproof IP 56 enclosure with fully sealed cable glands.
- Suitable for use with 110 / 250 volt 16 amps shore power pedestals. (Standard UK /EU blue plugs)
- 100 amp **internal** fault current capacity essential for total reliability. Built in status monitoring. Easytest.
- Designed to exceed electrical safety standards and marine specifications.
- Safeshore excellence in engineering and renowned customer service
- Supplied with full installation pack and clear easy to understand instructions
- Online or telephone help: Speak to a real person...We are always pleased to help!
- **Isolator dimensions: 200 x 150 x 80mm. Cable tail lengths : Approx 75cm each.**

Safeshore UK's most popular and effective galvanic isolators.

Simply safe, efficient, reliable and trusted!